

PREMIUM DIGITALLY CONNECTED TOTAL BASEMENT PROTECTION SUMP SYSTEM





CONSTRUCTION

- ▶ Complete, pre-plumbed sump pumps for easy installation in as little as 15 minutes
- ▶ Two fully submersible, nested, all cast iron, AC (primary) & DC (back up) sump pumps
- ▶ "Drop in the pit" ready, complete with two (2) pre-installed 1-1/2 in check valves
- ▶ 1-1/2 In. discharge for easy installation and compliance with building codes
- ▶ For use in 14 in. diameter or larger sump basins
- ▶ Redundant reed float switch with protective float cage

TECHNOLOGY

- ▶ Apple IOS and Android APPs for continuous monitoring, even when the power is out
- ▶ Innovative Local Link™ technology transmits data to the APP during power outages when the WiFi router is down
- ▶ Remote display box displays; hours of pumping power, battery health and charge, and water level
- ▶ FULLY REDUNDANT dual independent processor encased in a protective aluminum shell
- ▶ Solid State Air Switch replaces the mechanical float which is the most common point of failure on a sump pump



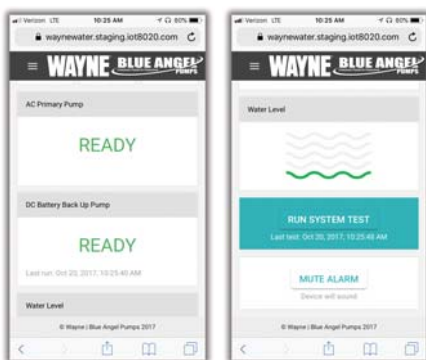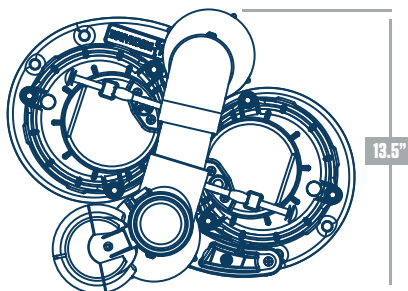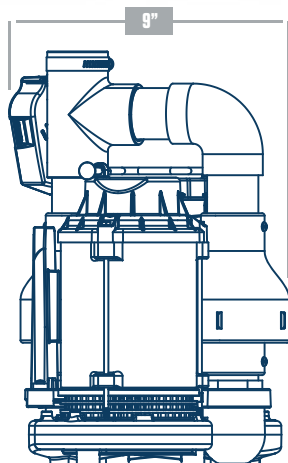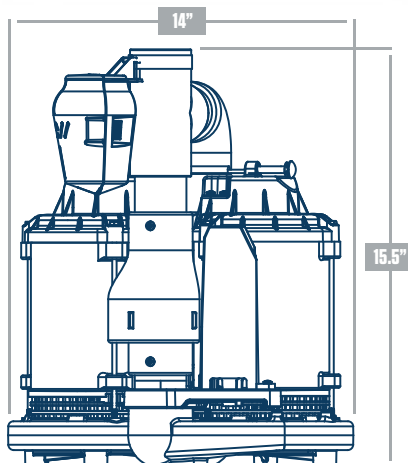

DIGITALLY CONNECTED DUAL CAST IRON BATTERY BACK-UP SUMP SYSTEM

MODEL: GEMINI GSP50

PUMP SNAPSHOT

- ▶ **HP** - 1/2 HP Primary / 1/7 HP Back Up
- ▶ **Construction** - All Cast Iron
- ▶ **Switch Type** - Pressure Activated Air Switch
- ▶ **Motor** - 1/2 HP PSC 120 Volt Primary AC motor
- ▶ **Motor** - 120W / 12-Volt Back Up
- ▶ **Impellers** - Centrifugal
- ▶ **Intakes** - Top Suction (Both)
- ▶ **Discharge** - 1 1/2 In.
- ▶ **Submersible** - Yes
- ▶ **UPC** - 040066218339

PUMP SPECIFICATIONS

- ▶ **Length** - 13 1/2 In.
- ▶ **Width** - 9 In.
- ▶ **Height** - 15 1/2 In.
- ▶ **Weight** - 66 Lbs.
- ▶ **Footprint** - 14 In.
- ▶ **Power Cord** - 10 Ft.

PERFORMANCE

- ▶ **Primary** - 1/2 HP - Max Flow 85 GPM: 64 GPM @ 10'
- ▶ **Secondary** - 12 VOLT - Max Flow 48 GPM: 32 GPM @ 10'
- ▶ **Combined** - Max Flow 109 GPM: 76 GPM @ 10'

FLOW RATE: GALLONS PER MINUTE

MODEL: GEMINI GSP50	FEET OF DYNAMIC HEAD			
	0'	5'	10'	15'
Primary	85	76	64	50
Secondary	49	44	34	24
Combined	109	94	76	56

5 YEAR LIMITED WARRANTY

- ▶ Assembled in USA with Foreign and Domestic Parts
- ▶ Requires one (1) 75 Amp Wayne battery for operation

