





100 Statuary




102 Crema




400 Lapidica




500 Neolith




504 Tourmaline



505 Onyx



700 Macchia



703 Emperador



505 Onyx


CROSS CUT

Style Name	CROSS CUT	
Style Number	5655V	
Construction	Heavy Commercial Luxury Vinyl	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Attached Underlayment	No	
Finish	ExoGuard [®]	
Nominal Dimensions	U.S. 9 in w, 63 in l	Metric 23 cm w, 160 cm l
Actual Dimensions	9 in w, 63 in l	22.86 cm w, 160.02 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.197 in	5 mm
Installation	Direct Glue, Floating or Perimeter Gl	
Recommended / Required Adhesive	Shaw 4100 or S150	

Packaging

Pieces per box	6 pcs	
Area per box	23.62 sq ft	2.19 sq m
Weight per box	41.03 lbs	18.61 kg

Recommended Installation Method

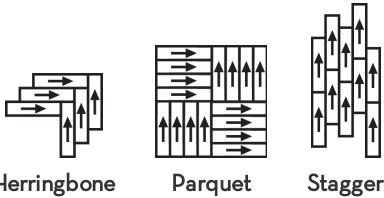

Performance Testing

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient
Resilient 15 Year Commercial Limited

Environmental

Recycled Content Pre-consumer - 0%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.