





365 Springtime



366 Fairway



498 Rolling Thunder




499 Imperial Sky




832 High Voltage



932 Nimbus



933 Twilight



1163 Cirrus




2088 Summer Glow




4001 Ice Storm



366 Fairway



5205 Stratus



6035 Daybreak



6037 Shockwave




7298 Horizon

Style Name	CUMULUS	
Style Number	5043V	
Construction	Heavy Commercial Luxury Vinyl Tile	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Attached Underlayment	No	
Finish	ExoGuard®	
	U.S.	Metric
Nominal Dimensions	24 in w, 24 in l	61 cm w, 61 cm l
Actual Dimensions	24 in w, 24 in l	60.96 cm w, 60.96 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	LokWorx+ (236MM) or S150 (5025M)	

Packaging

Pieces per box	14 pcs	
Area per box	56 sq ft	5.2 sq m
Weight per box	47.4 lbs	21.5 kg

Recommended Installation Method

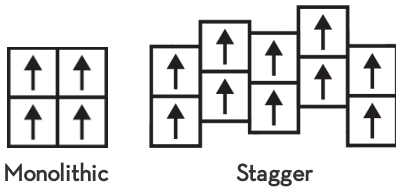

Performance Testing

Resistance to Chemicals (ASTM F925)	Passes
-------------------------------------	--------

Warranties

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient
Resilient 15 Year Commercial Limited

Environmental

Indoor Air Quality	FloorScore® Certified
Recycled Content	Pre-consumer - 0%, Post-consumer - 0%

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.

