


**RFA & RFWA**

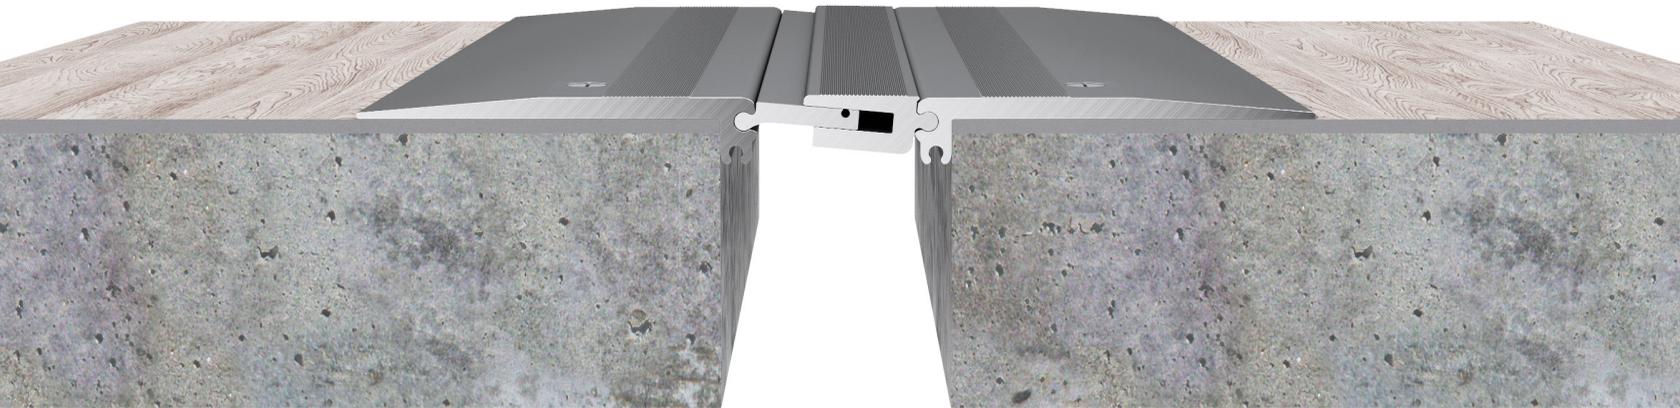

This all-metal, surface-mounted cover is resistant to rolling loads, distortion, and wear. It includes slip-resistant serrations and is intended for interior or exterior applications where minimal movement is expected. The unique interlocking cover design allows for horizontal movement in the floor slab, as well as some vertical deflection and is extremely low maintenance.

**Features**

- For applications where low maintenance is desired
- Can be used for new or retrofit applications
- Interlocking hinged frame design
- Surface-mounted, no blockouts required

**Benefits**

- Resistant to rolling loads, distortion, and wear
- Slip-resistant serrations
- Can accommodate offsets in floor elevation
- Can be installed in many pre-existing applications

## RFA & RFWA

### Product Details

- Joint sizes range from 2" to 4"
- Available in 10' stock lengths

### Certifications

- Covers are in accordance with ASTM E1399 testing

### Warranty


- Standard Five-Year Warranty

### Finish Options


- Aluminum finish – Mill
- Aluminum in contact with concrete/masonry will have a 2 mil heavy metal free high solids primer

*See all finish options online at [c-sgroup.com](http://c-sgroup.com).*

### Model Details



RFA-200



RFWA-200

