


Pro•Tek® Industrial & Commercial Impact Protection Systems

Architectural Building Products Since 1945


E-2 Molded Bumper

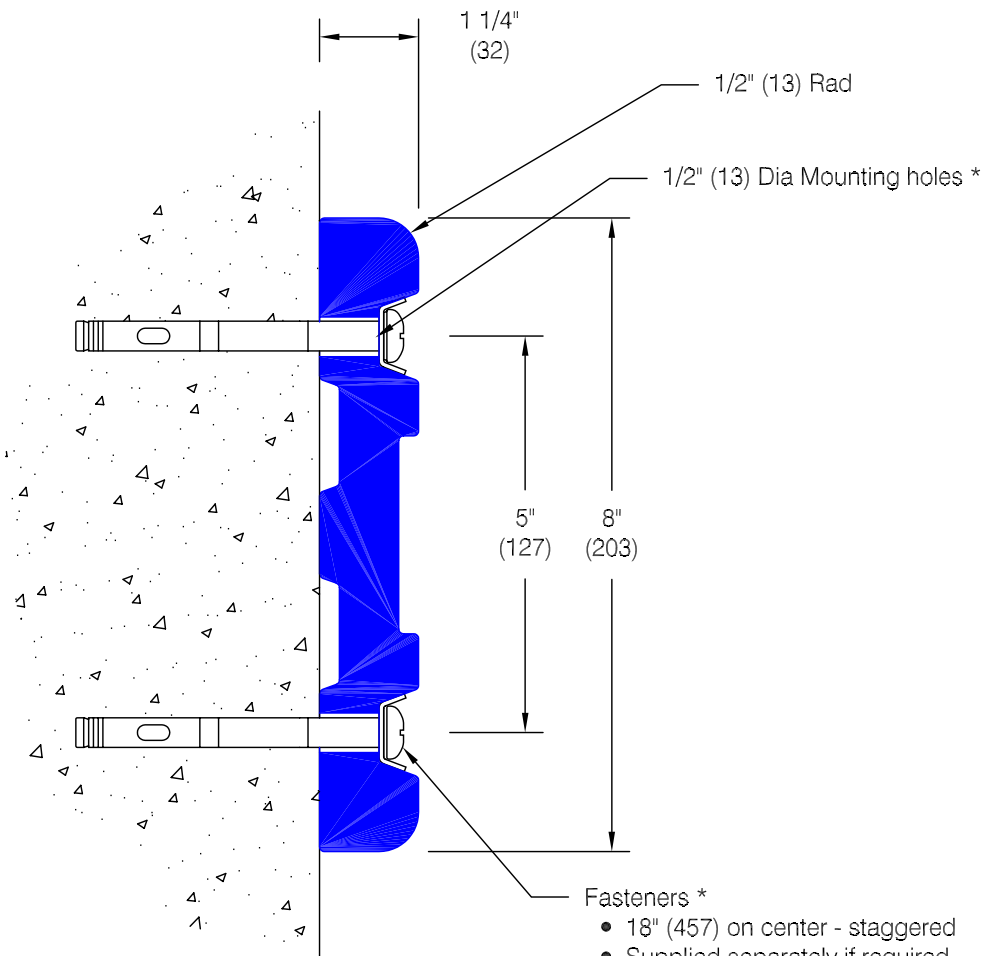

* **Standard bumper is supplied undrilled and with no mounting hardware. Hole spacing shown for bumpers 56" (1422) and longer. Contact factory for hole spacing on lengths shorter than 56" (1422).**

Fasteners *

- 18" (457) on center - staggered
- Supplied separately if required
- Suggested concrete hardware: 3/8" (10) x 3 3/4" (95) Lok bolt ABLB-8 with U-washer ABUW-90

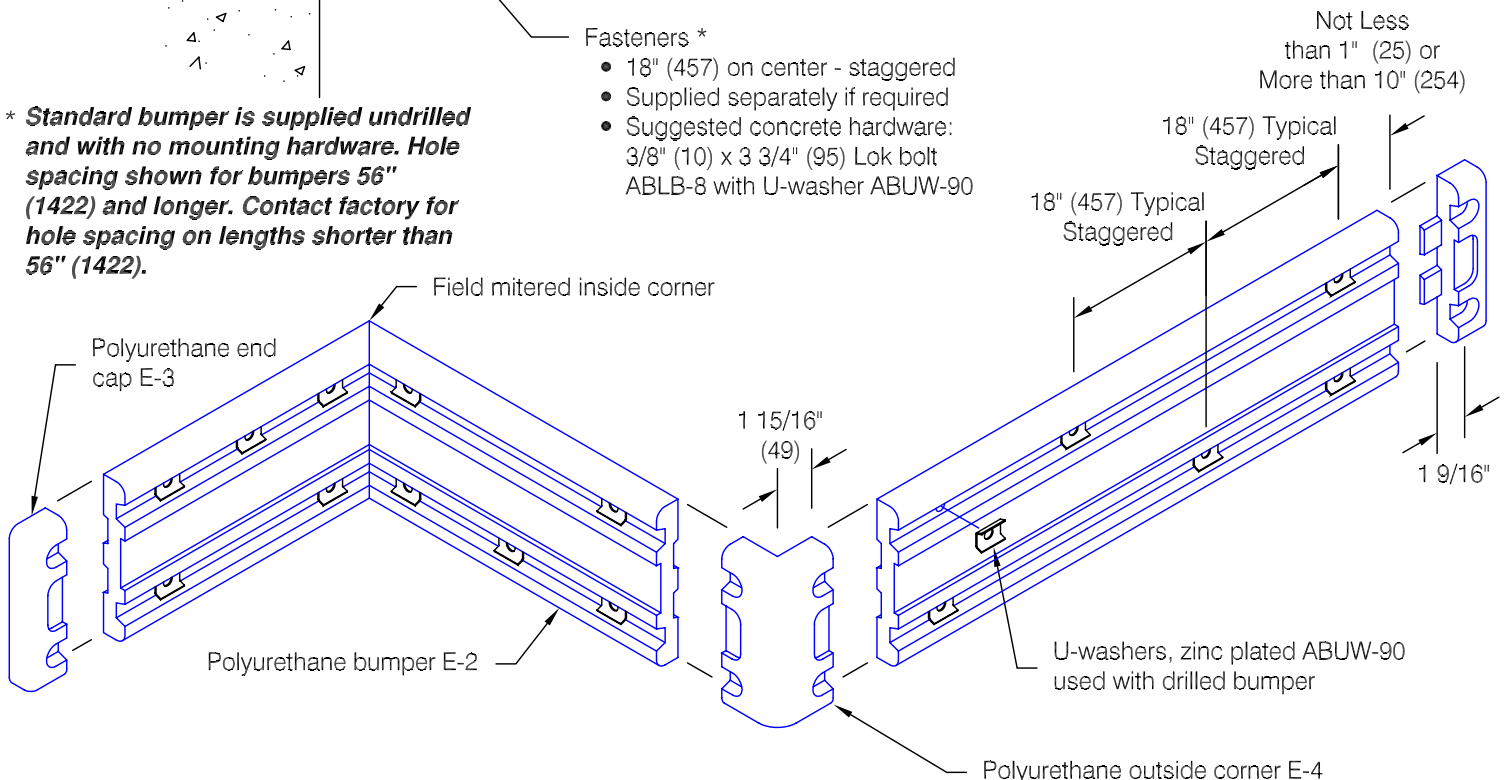

Features:

- Molded polyurethane
- Durometer: (ASTM D-412) 70 ±5 shore A
- Tensile strength PSI: (ASTM D-412) 592 min.
- Elongation: (ASTM D-412) 61% min.
- Tear strength: (ASTM D-624) 166 lbs./in. min.
- Stock length: 10'-0" (3048)

Optional Features:

- Drilled for hardware:
Approximately 1" (25)-10" (254)
in from each end, staggered
18" (457) on center both grooves
(Varies as restricted by length)
- Custom drilling available

Standard Color:

- Charcoal #38

Pawling Corporation reserves the right to discontinue a design or modify an existing design without prior notice

Customer :

Project :

Architect :

Sales Rep :

CD.105.0c