

Movement Rating ± 50%




- Designed to accommodate various flooring thicknesses from carpet to VCT
- Overlap design reduces sightline
- Easy to install
- Economical solution for retrofit and surface mount installations
- Mill finish aluminum
- Designed for uneven slab conditions
- Pre-drilled counter-sunk holes for easy installation


Application	System	W		H1		H2		S		В		Movement +/-			
		Joint Width		Frame Height 1		Height 2		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Floor to Floor	J807-A01-050	2"	50	3/16"	5	1/8,3/8"	3,10	2"	50	*	*	1"	25	+1/4" / -1"	+5 / -25
	J807-A01-075	3"	75	3/16"	5	1/8,3/8"	3,10	2"	50	*	*	1 1/2"	38	3/8"/-1 1/2"	+7/-38
	J807-A01-100	4"	100	3/16"	5	1/8,3/8"	3,10	2"	50	*	*	2"	51	+5/8" / -2"	+10/-51
	J807-A01-150	6"	150	3/16"	5	1/8,3/8"	3,10	2"	50	*	*	3"	76	+7/8" / -2 3/4"	+13/-71
Floor to Wall	J807-A02-050	2"	50	*	*	1/8,3/8"	3,10	2"	50	*	*	1"	25	+1/4" / -1"	+6 / -25
	J807-A02-075	3"	75	*	*	1/8,3/8"	3,10	2"	50	*	*	1 1/2"	38	3/8"/-1 1/2"	+7/-38
	J807-A02-100	4"	100	*	*	1/8,3/8"	3,10	2"	50	*	*	2"	51	+5/8" / -2"	+10/-51
	J807-A02-150	6"	150	*	*	1/8,3/8"	3,10	2"	50	*	*	3"	76	+7/8" / -2 3/4"	+13/-71

IPC.799/REV.7




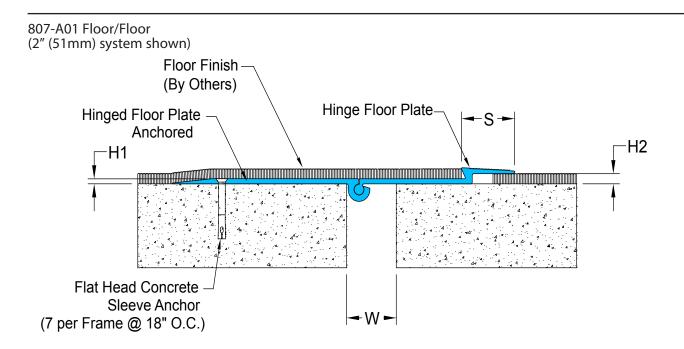

807-A02 Floor/Wall (2" (51mm) system shown)

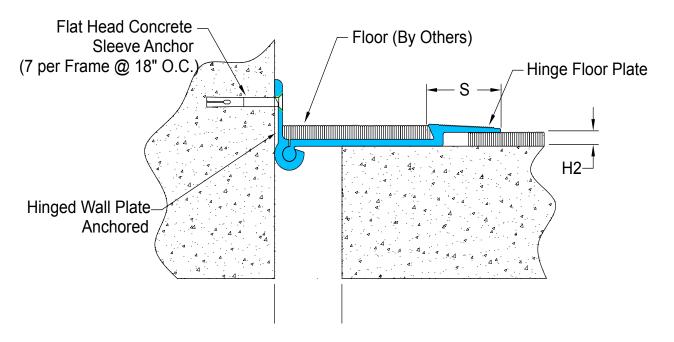

inpro.

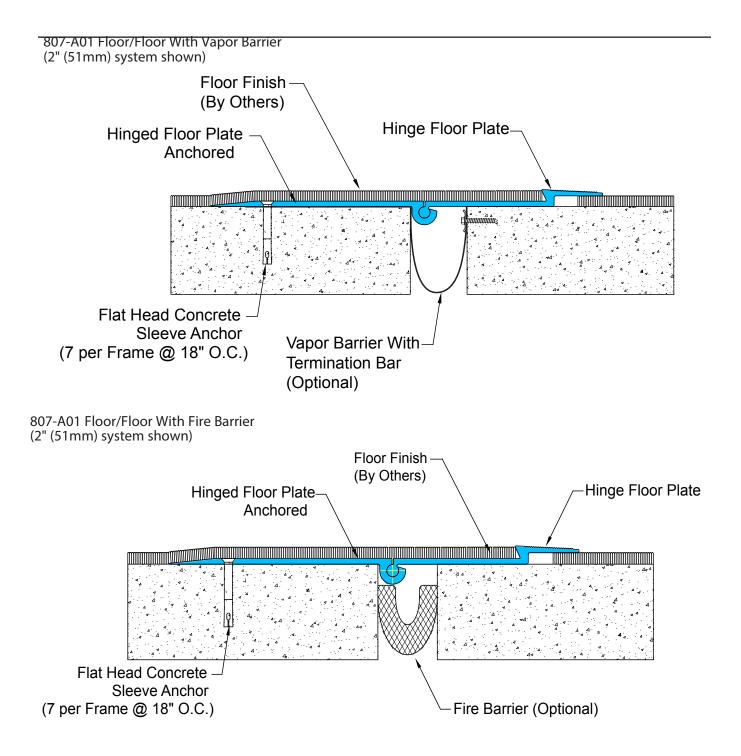

inpro.