



116 Rye




216 Hemp



170 Elmwood



256 Millet




173 Nutshell



559 Frosted Oats




174 Fir




564 Freekeh




174 Fir




568 Flaxseed




572 Milo




684 Farro




740 Barley



769 Amaranth




774 Wheat




775 Spelt




5012 English Grey




5013 Drift




5016 Ember




5019 Briarwood




7003 Sandalwood



7004 Cotton Seed



7007 Oakwood



7008 Burlwood


Style Name	In The Grain II 12 mil	
Style Number	5524V	
Construction	High Performance Luxury Vinyl Tile	
Class / ASTM F1700	Class III Printed Film Vinyl Tile	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	6 in w, 48 in l	15 cm w, 122 cm l
Actual Dimensions	5.96 in w, 48 in l	15.14 cm w, 121.92 cm l
Wear Layer Thickness	12 mil (0.012 in)	0.3 mm
Overall Thickness	0.098 in	2.5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	Shaw 4100 or S150	



Packaging

Pieces per box	21 pcs	
Area per box	41.72 sq ft	3.88 sq m
Weight per box	36 lbs	16.33 kg

Recommended Installation Method

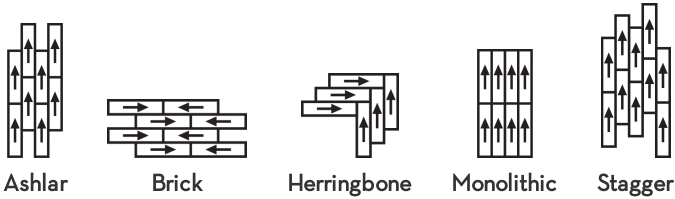

Performance Testing

Resistance to Chemicals (ASTM F925) **Passes**

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

7 Year Commercial Limited
Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient

Environmental

Indoor Air Quality **FloorScore® Certified**
Recycled Content **Pre-consumer - 30%, Post-consumer - 0%**

Specifications are subject to nominal manufacturing variance.
Material supply and/or manufacturing processes may necessitate changes without notice.

