



116 Rye

216 Hemp



170 Elmwood

256 Millet



173 Nutshell

559 Frosted Oats



174 Fir

564 Freekeh



174 Fir




568 Flaxseed


572 Milo



684 Farro



740 Barley




769 Amaranth




774 Wheat


775 Spelt



5012 English Grey



5013 Drift



5016 Ember




5019 Briarwood


7003 Sandalwood



7004 Cotton Seed



7007 Oakwood



7008 Burlwood




Style Name	In The Grain II 20 mil	
Style Number	5525V	
Construction	High Performance Luxury Vinyl Tile	
Class / ASTM F1700	Class III Printed Film Vinyl Tile, Type B (embossed)	
Finish	ExoGuard+®	
	U.S.	Metric
Nominal Dimensions	6 in w, 48 in l	15 cm w, 122 cm l
Actual Dimensions	5.96 in w, 48 in l	15.14 cm w, 121.92 cm l
Wear Layer Thickness	20 mil (0.02 in)	0.51 mm
Overall Thickness	0.098 in	2.5 mm
Installation	Direct Glue	
Recommended / Required Adhesive	Shaw 4100 or S150	



## Packaging

Pieces per box	21 pcs	
Area per box	41.72 sq ft	3.88 sq m
Weight per box	35.44 lbs	16.08 kg

## Recommended Installation Method

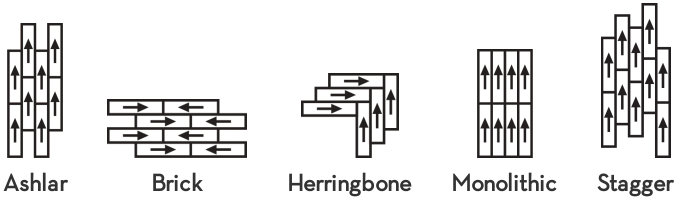

## Performance Testing

Resistance to Chemicals (ASTM F925) **Passes**

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient  
Resilient 15 Year Commercial Limited

## Environmental

Indoor Air Quality **FloorScore® Certified**  
Recycled Content **Pre-consumer - 30%, Post-consumer - 0%**

Specifications are subject to nominal manufacturing variance.  
Material supply and/or manufacturing processes may necessitate changes without notice.

