



116 Rye

216 Hemp



170 Elmwood

256 Millet



173 Nutshell

559 Frosted Oats




174 Fir

564 Freekeh




174 Fir

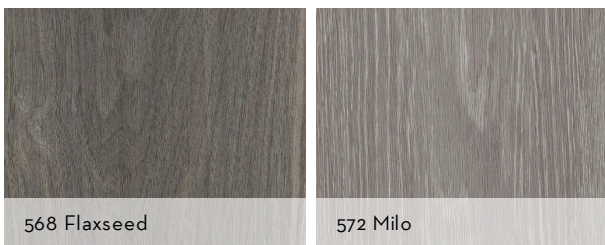

568 Flaxseed

572 Milo

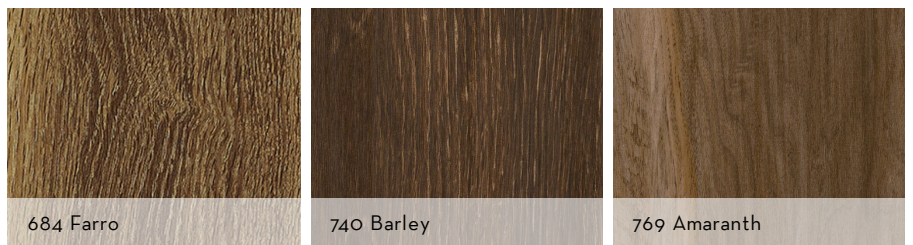

684 Farro


740 Barley

769 Amaranth



774 Wheat

775 Spelt

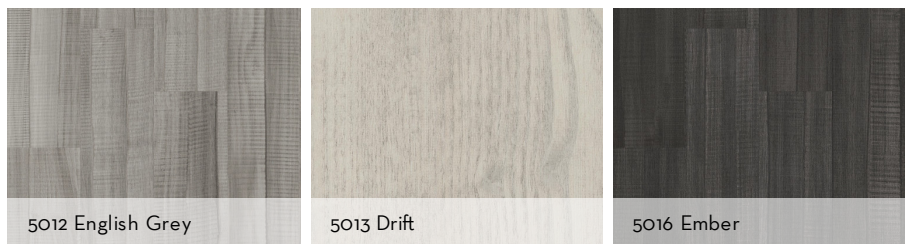

5012 English Grey

5013 Drift

5016 Ember



5019 Briarwood

7003 Sandalwood



7004 Cotton Seed

7007 Oakwood

7008 Burlwood




Style Name	<b>In the Grain II 30</b>	
Style Number	<b>5536V</b>	
Construction	<b>Performance Luxury Vinyl Tile</b>	
Class / ASTM F1700	<b>Class III Printed Film Vinyl Tile, Type B (embossed)</b>	
Finish	<b>ExoGuard+®</b>	
	U.S.	Metric
Nominal Dimensions	<b>6 in w, 48 in l</b>	<b>15 cm w, 122 cm l</b>
Actual Dimensions	<b>5.96 in w, 48 in l</b>	<b>15.14 cm w, 121.92 cm l</b>
Wear Layer Thickness	<b>30 mil (0.03 in)</b>	<b>0.76 mm</b>
Overall Thickness	<b>0.18 in</b>	<b>3 mm</b>
Installation	<b>Direct Glue</b>	
Recommended / Required Adhesive	<b>Shaw 4100 or S150</b>	



## Packaging

Pieces per box	<b>18 pcs</b>	
Area per box	<b>35.76 sq ft</b>	<b>3.32 sq m</b>
Weight per box	<b>33.3 lbs</b>	<b>15.1 kg</b>

## Recommended Installation Method

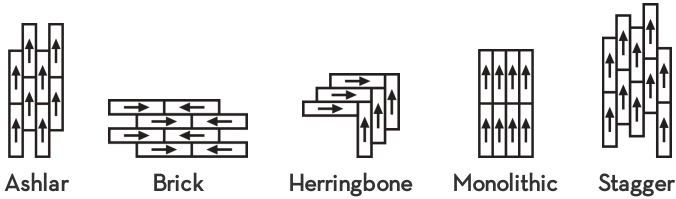

## Performance Testing

Resistance to Chemicals (ASTM F925) **Passes**

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

## Warranties

**Commercial Limited Underbed Bond Warranty S150/4151/LokWorx+ Resilient Resilient 15 Year Commercial Limited**

## Environmental

Indoor Air Quality **FloorScore® Certified**  
 Recycled Content **Pre-consumer - 30%, Post-consumer - 0%**

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

