
115 Series

A24 - Ceiling to Ceiling
A18 - Wall to Ceiling

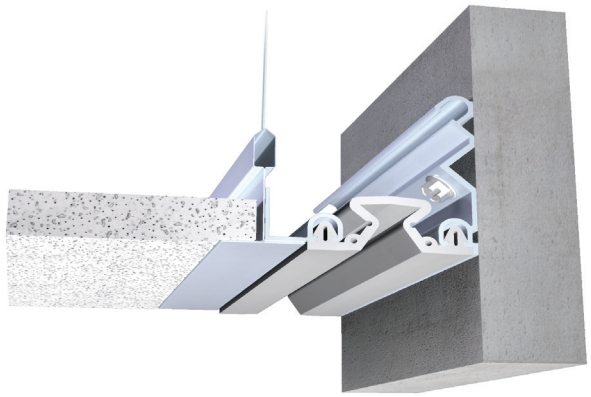

Movement Rating ± 50%

Product Guide

Thermal **Interior**

- Model **115** frame pop rivets to T-Bar profile in suspended ceiling system
- Bellows seal allows for seismic movement
- Standard and Custom seal colors available.
  - All seals achieve UL Environmental Greenguard Gold Certification for ultra low VOC's

Application	System	W		H1		H2		S		B		Movement +/-			
		Joint Width		Frame Height 1		Height 2		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Ceiling/Ceiling	115-A24-050	2"	51	*	*	*	*	2"	51	*	*	1"	25	1"	25
	115-A24-075	3"	76	*	*	*	*	3"	76	*	*	1 1/2"	38	1 1/2"	38
	115-A24-100	4"	102	*	*	*	*	4"	102	*	*	2"	51	2"	51
	115-A24-125	5"	127	*	*	*	*	5"	127	*	*	2 1/2"	64	2 1/2"	64
	115-A24-150	6"	152	*	*	*	*	6"	152	*	*	3"	76	3"	76
Wall/Ceiling	115-A18-050	2"	51	*	*	*	*	2"	51	*	*	1"	25	1"	25
	115-A18-075	3"	76	*	*	*	*	3"	76	*	*	1 1/2"	38	1 1/2"	38
	115-A18-100	4"	102	*	*	*	*	4"	102	*	*	2"	51	2"	51
	115-A18-125	5"	127	*	*	*	*	5"	127	*	*	2 1/2"	64	2 1/2"	64
	115-A18-150	6"	152	*	*	*	*	6"	152	*	*	3"	76	3"	76


May be available in larger widths, please contact InPro Corporation for more details.

inpro.com • 800.222.5556 • 262.679.9010
World Headquarters S80 W18766 Apollo Drive, Muskego, WI 53150 USA


115 Series

Acoustical Ceiling Systems

115-A24
Ceiling/Ceiling
(2" (50mm) system shown)

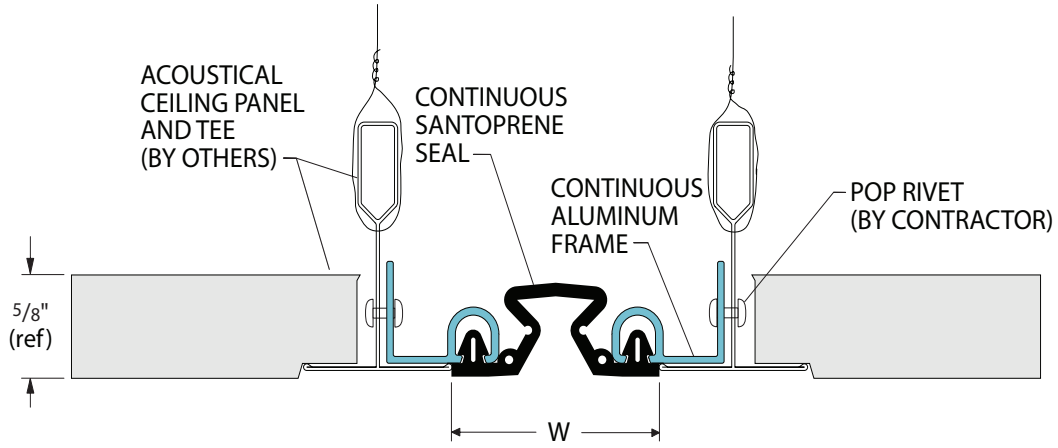

115-A18
Ceiling/Wall
(2" (50mm) system shown)

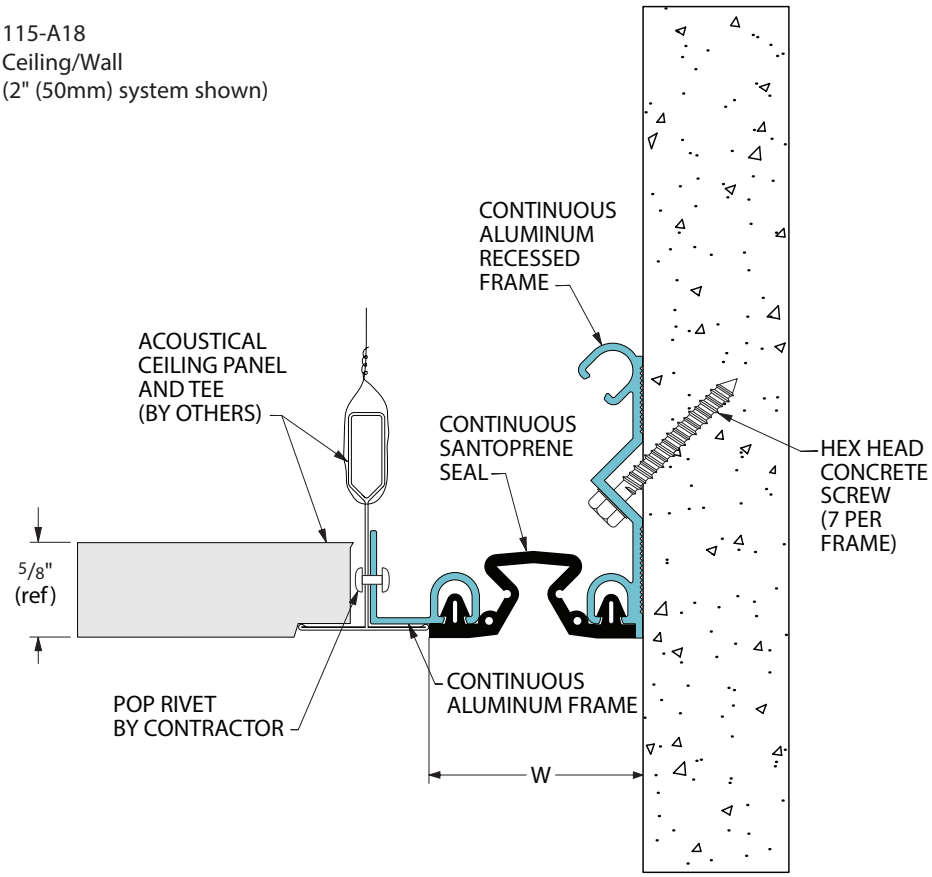

inpro.com • 800.222.5556 • 262.679.9010
World Headquarters S80 W18766 Apollo Drive, Muskego, WI 53150 USA