


NGP

4

Stop Strip

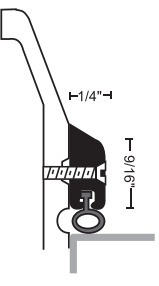

THRESHOLD

BHIMA
CERTIFIED



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. FOR APPLICATION TO HOLLOW-METAL-TYPE FIRE DOORS RATED UP TO 3 HOURS AND WOOD-TYPE FIRE DOORS RATED UP TO 1½ HOURS.


CATEGORY J

- Aluminum Alloy 6063, T5 Temper
- 1/4" Tall
- Weight: .14 Lb/Ft.
- Vinyl is Black; NGP-TPV and Silicone are Black
- #6 Self-Tapping Machine Screws Included

ngp.com
1-800-NGP-RUSH

INSTALLATION INSTRUCTIONS

4

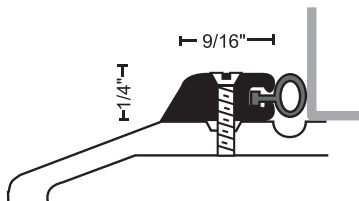

1. Cut threshold to size required.
2. Notch around door frame if desired.
3. Attach to floor surface with fasteners provided.
4. Caulk around base of threshold for moisture control.



ngp.com

1-800-NGP-RUSH

FAX: (800) 255-7874

QUOTES: quotes@ngp.com

ORDERS: orders@ngp.com

NGP MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706