


FRACTURED



200 Compose



300 Imagine



400 Sculpt



500 Shape



505 Model



700 Construct



705 Form



800 Produce




510 Create

Style Name	FRACTURED
Collection Name	Surface Works
Style Number	54872
Product Type	Carpet Tile
Construction	Multi - Color Pattern
Fiber	100% Eco Solution Q [®] Nylon
Dye Method	Solution Dyed
Primary Backing	Synthetic
Secondary Backing	Strataworx
Traffic Rating	Heavy
Protective Treatments	SSP Shaw Soil Protection

	U.S.	Metric
Product Size	24 in x 24 in	6096 cm x 6096 cm
Area Per Carton	80 ft ²	7.43 m ²
Pieces Per Carton	20	
Gauge	1/10 in	39.37 per 10 cm
Stitches	10 per in	39 per 10 cm
Finished Pile Thickness	0.096 in	2.44 mm
Average Density	6000 oz/yd ³	
Total Thickness	0.239 in	6.07 mm
Tufted Weight	16 oz/yd ²	542.5 g/m ²

Recommended Installation Methods

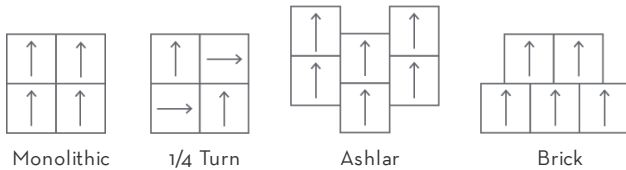

Performance Testing

Pill Test	Pass
Radiant Panel	Class I
NBS Smoke	Less than 450
Electrostatic Propensity	Less than 3.5 kv
CRI Greenlabel Plus	GLP2671
ADA Compliance	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Carpet Tile 15 year Commercial Limited Warranty with Stain and Color for StrataWorx

Environmental

Recycled Content Pre-consumer - 24%, Post-consumer - <1%

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.