




93205 Vigorous



93400 Zealous




93500 Dynamic



93506 Dexterous



93510 Enthusiastic



93515 Influential




93520 Industrious



93700 Magnetic

Style Name	<b>SHARED FORCE</b>	
Style Number	<b>54993</b>	
Product Type	<b>Carpet Tile</b>	
Construction	<b>Multi-Level Pattern Loop</b>	
Fiber	<b>100% Eco Solution Q<sup>®</sup> Nylon</b>	
Dye Method	<b>Solution Dyed</b>	
Primary Backing	<b>Synthetic</b>	
Secondary Backing	<b>Strataworx</b>	
Traffic Rating	<b>Heavy</b>	
	U.S.	Metric
Product Size	<b>18 in x 36 in</b>	<b>45.72 cm x 91.44 cm</b>
Area Per Carton	<b>63 ft<sup>2</sup></b>	<b>5.85 m<sup>2</sup></b>
Pieces Per Carton	<b>14</b>	
Gauge	<b>1/10 in</b>	<b>39.37 per 10 cm</b>
Stitches	<b>10 per in</b>	<b>41 per 10 cm</b>
Finished Pile Thickness	<b>0.107 in</b>	<b>2.72 mm</b>
Average Density	<b>5383 oz/yd<sup>3</sup></b>	
Total Thickness	<b>0.215 in</b>	<b>5.46 mm</b>
Tufted Weight	<b>16 oz/yd<sup>2</sup></b>	<b>542.5 g/m<sup>2</sup></b>

## Recommended Installation Methods

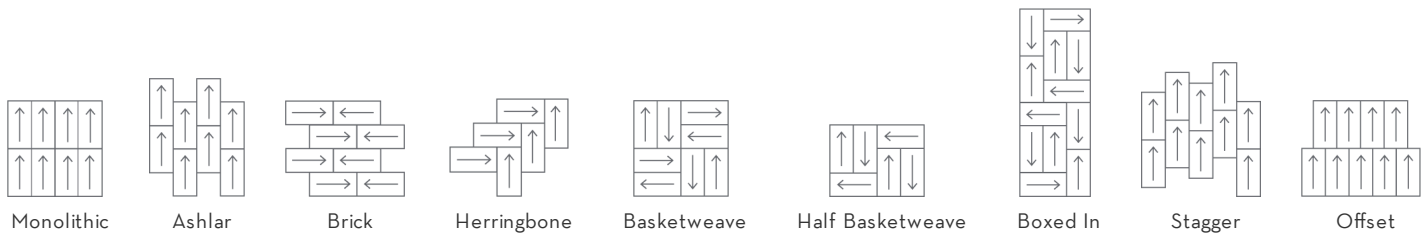

## Performance Testing

Pill Test	<b>Pass</b>
Radiant Panel	<b>Class I</b>
NBS Smoke	<b>Less than 450</b>
Electrostatic Propensity	<b>Less than 3.5 kv</b>
CRI Greenlabel Plus	<b>GLP2671</b>
ADA Compliance	<b>&gt;0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes</b>

## Environmental

Recycled Content	<b>Pre-consumer - 24%, Post-consumer - &lt;1%</b>
------------------	---

Specifications are subject to nominal manufacturing variance.  
Material supply and/or manufacturing processes may necessitate changes without notice.