

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 50 feet
- Recyclable
- LEED points qualified

TECHNICAL INFORMATION:

Sizes: 15-3/8" x 8-3/4" x 3/4"

Letter size: 7/8" stroke with 7" height

Background: Black, Red, Green, White

Illumination: High Visibility Green

Visibility: 50 feet

Directional: (2) Chevron arrows included for easy direction selection

Construction: ABS plastic with photoluminescent panel

Durability: Explosion-proof for areas requiring explosion-proof exit signage

TESTS PASSED:

UL 924 Emergency Lighting and Power Equipment Listed through UL;

Meets NFPA Life Safety Code 101 and OSHA requirements;

International Building Code 2009; International Fire Code 2009

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

NO additional electrical or mechanical source required

INSTALLATION:

Surface, flag, ceiling or stem mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy.




APPLICATIONS:

Both high-level and low-level

Suitable for floor proximity installation

Catalog #	Frame Color	No. of Faces	Mounting Bracket	
70	4 - Green	0 - Single Sided	B - Bracket	
	5 - Red	2 - Double Sided	CDT-B - Conduit Bracket	
	6 - Black			
70 _____ - _____ (fill in for model #) For example: 7062-B (Double sided Black with bracket)				
Catalog #	Frame Color	Letter Outline	No. of Faces	Mounting Bracket
7	1 - White	2 - Green	0 - Single Sided	B - Bracket
		3 - Red	2 - Double Sided	CDT-B - Conduit Bracket
7 _____ - _____ (fill in for model #) For example: 7120-B (Single sided White with Green Outline with Bracket)				

Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.

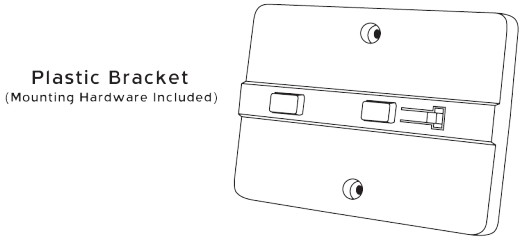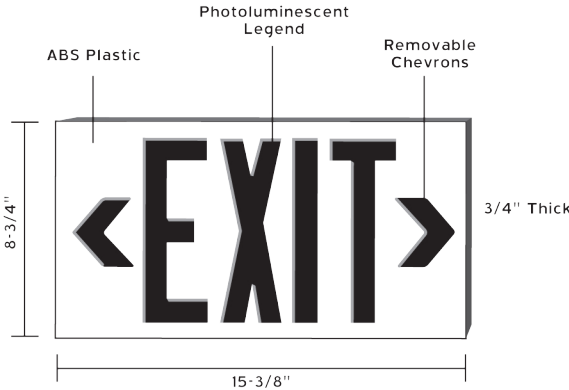

Jessup Manufacturing Company  
ph: 815.385.6650  
fax: 815.385.0079  
Internet: [www.globritesystem.com](http://www.globritesystem.com)  
E-mail: [jmc@jessupmfg.com](mailto:jmc@jessupmfg.com)

