



Traction Tread™ Ladder Rungs

Traction Tread™ Ladder Rungs feature a hand-over-hand friendly surface with moderate slip resistance. Products are sold in efficient lengths, well suited to fabricators of ladders. Vehicle applications are extensive.



2-Hole Ladder Rung



3-Hole Ladder Rung



4-Hole Ladder Rung

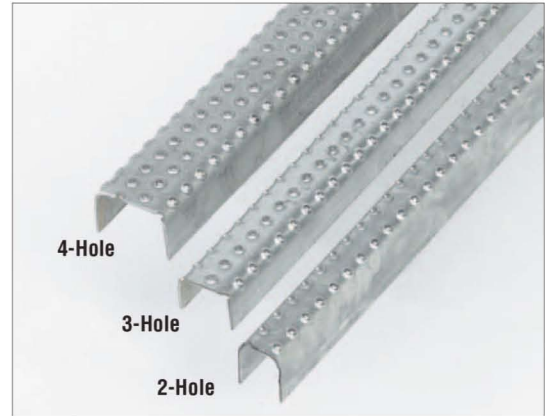

- Hot rolled, pickled and oiled carbon steel: 13 gauge (1.2 lbs./ft.)
- Aluminum alloy 5052-H32: .125" (0.5 lbs./ft.)
- 1¹/₄" wide x 1¹/₂" high x 48" or 60" long

- Hot rolled, pickled and oiled carbon steel: 13 gauge (1.3 lbs./ft.)
- Aluminum alloy 5052-H32: .125" (0.5 lbs./ft.)
- 1⁵/₈" wide x 1¹/₈" high x 48" or 60" long

- Hot rolled, pickled and oiled carbon steel: 13 gauge (1.5 lbs./ft.)
- Aluminum alloy 5052-H32: .125" (0.7 lbs./ft.)
- 2¹/₄" wide x 1¹/₂" high x 48" or 60" long