

Product Information

Product Lines - Coved Wall Base & Sculptured Wall Base

Construction - Thermoplastic Rubber

Product Specifications - Coved Wall Base - ASTM F1861, Type TP, Group 1, Style B


Sculptured Wall Base - ASTM F1861, Type TP, Group 1, Style A

Overall Thickness - Coved Wall Base - 0.125 in. (3.18 mm)


Sculptured Wall Base - 0.25 in. (6.35 mm)

Installation - S-725 Wall Base Adhesive

Product Structures

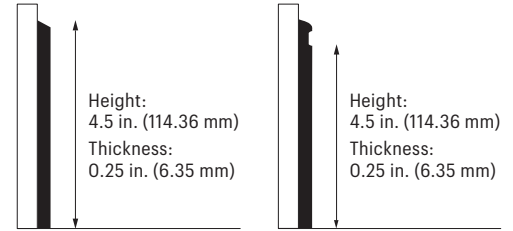

Sculptured Wall Base



Coved Wall Base

Packaging

Products	Height	Feet per Carton	Feet per Carton
Coved - Sticks	4.0 in. (101.6 mm)	120 lin. ft. (36.57 m)	30
Coved - Rolls			1
Sculptured	4.5 in. (114.3 mm)	48 lin. ft. (14.63 m)	6

Testing

Performance	Test Method	Requirement	Performance vs. Requirement
Composition of Materials	Certificate of Compliance	As specified	Meets
Wear Layer Thickness	ASTM F410	≥ 0.002 in.	Meets
Flexibility	ASTM F137	¼ inch mandrel no cracks or breaks in wear surface	Meets
Staining of adjacent surfaces induced by wall base	ASTM F1861 Section 12	No staining of adjacent surfaces	Meets
Resistance to Light	ASTM F 1515	Max. avg. ΔE ≤ 8	Meets
Resistance to Chemicals	ASTM F 925	No more than slight change in surface dulling, attack or staining	Meets
Dimensional Stability	ASTM F1861 Section 12	±0.25%	Meets
Height	ASTM F1861 Section 9	As specified, ±1% of nominal height	Meets
Thickness	ASTM F386	As specified, 0.080 in. +0.015/ -0.005 in. 0.25 in. + 0.015/ -0.015 in.	Meets
Length	ASTM F1861 Section 9	As specified, no less than nominal value	Meets
Additional Testing			
Fire Test Data – Flame Spread	ASTM E 648	0.45 W/cm2 or more Class I	Meets
Fire Test Data – Smoke Evolution	ASTM E 662	450 or less	Meets

Sustainability

Certification Attribute	Standard	Feet per 3rd party Certification/Certifier
Low-Emitting Material	CDPH v1.2 (2017) a.k.a CHPS 01350	FloorScore®/SCS
Low-Emitting Adhesive (S-725)	CDPH v1.2 (2017) a.k.a CHPS 01350	FloorScore®/SCS

Sustainability Continued

Performance	Standard	Requirements	Performance vs. Requirements
TVOC Range	CDPH v1.2 (2017) a.k.a CHPS 01350	<0.5 mg/m³	Meets
Low Emitting Adhesives (S-725)	SCAQMD Rule #1168	Less than 50 g/L	S-725 Exceeds – 0 g/L
Fundamental Material Safety Toxic Material Reduction	WELL™ Feature 11 and 25	No asbestos, free of lead and phthalates (DEHP, DBP, BBP, DIDP, DNOP)	Meets

Limited Warranty

5-year Commercial Warranty when installed in strict accordance with the detailed instructions at ArmstrongFlooring.com.

4 ft. Sticks - R41XX
Roll Cove - R48XX

					
R41SL R48SL Salt R53SL R52SL Salt ♦	R41PR R48PRI parchment R53PR R52PR parchment ♦	R41CI R48CI classic ivory R53CI R52CI classic ivory ♦	R41DS R48DS Desert	R41ES R48ES Essential Sand	R41CM R48CM Camel
					
R41CR R48CR Carbon Beige R53CR R52CR Carbon Beige ♦	R41PB R48PB Pebble	R41GR R48GR Greige	R41FX R48FX Flax	R41TR R48TR Turmeric	R41SD R48SD Saddle
					
R41BH R48BH Buffalo Hide	R41ML R48ML Molasses R53ML R52ML Molasses ♦	R41WB R48WB Warm Black	R41FS R48FS Flagstone	R41EB R48EB Ebony R53EB R52EB Ebony ♦	R41ND R48ND Indigo
					
R41GM R48GM Gray Mist	R41SW R48SW Stonewash	R41MG R48MG Metal Gray	R41SG R48SG Smokey Gray R53SG R52SG Smokey Gray ♦	R41CG R48CG Coastal Green	R41AN R48AN Almost Navy

♦ Available in Sculptured Wall Base
Profile 1 - R53XX
Profile 2 - R52XX

Visit ArmstrongFlooring.com

for complete Product, Technical, Adhesives, Installation & Maintenance recommendations.

FP7440F10440-921

Armstrong and the Armstrong logo are under license from AWI Licensing LLC. | All other trademarks are owned by AFI Licensing LLC. | © 2021 AFI Licensing LLC. FloorScore® is a registered trademark of the Resilient Floor Covering Institute. | LEED® is a registered trademark of the United States Green Building Council

