



Innovative Tile and Stone  
Installation Systems


# PermaColor™ Grout



Private Residence, Woodbridge, CT



Private Residence, Woodbridge, CT

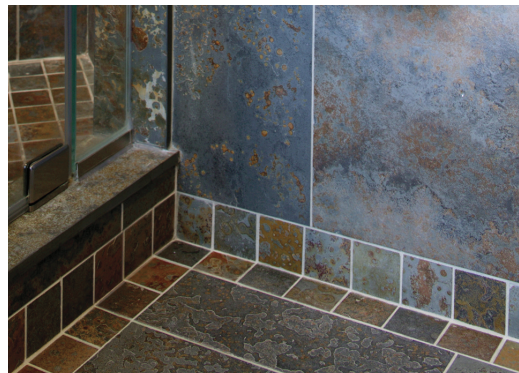

Private Residence, Woodbridge, CT



- Consistent color
- Moderate stain resistance
- Contains Microban® antimicrobial product protection
- Ideal for floors and walls
- Strong, hard grout joints – resists cracking and powdering

LATICRETE® PermaColor™ Grout offers the maximum performance available in a cement-based grout, providing consistent color and Microban® to resist stain-causing mold and mildew. LATICRETE PermaColor Grout is easy to

install – just mix with water. LATICRETE PermaColor Grout is ideal for floors and walls in both interior and exterior installations. When you must use a cement-based grout, choose LATICRETE PermaColor Grout.

FEATURES	BENEFITS
Consistent Color	No blotchiness, resists efflorescence.*
1 Step — Mix with Water	Easy to install, no additive required.
Stain-Resistant	Easy to clean, highly stain-resistant for a cement-based grout.**
Equipped with Microban®	Inhibits the growth of stain-causing mold and mildew in the grout joints.
For Joint Widths of 1/16" – 1/2" (1.5 mm – 12 mm)	Ideal for floor and wall applications.
Strong and Durable Cement-based Grout (Applicable Standard ANSI A118.7)	Resists cracking and powdering.
A Component of the LATICRETE® 15 Year Residential Warranty† and LATICRETE 10 Year System Warranty†	Performance backed by LATICRETE means peace of mind for trouble-free installations in both interior and exterior applications.
GREENGUARD Certified for Better Indoor Air Quality	Contributes to LEED certification and low VOCs.
Kevlar® Reinforced	Exclusive feature provides superior strength for a cement-based grout.

Uses

- Ceramic tile and stone applications
- Interior and exterior
- Floors and walls
- Residential and commercial\*\*\*

Packaging

25 lb bag (11.3 kg)

Available Colors

40 lifestyle colors★



\* Significantly reduces the potential for efflorescence when compared with traditional portland cement-based grout.  
\*\* For maximum stain resistance use LATICRETE® SpectraLOCK® PRO Grout.  
\*\*\* Refer to Data Sheet 250.0 for limitations.  
† Refer to LATICRETE Grout Color Chart (Data Sheet 254.3) for complete color selection information.  
‡ See Data Sheets 254.1 and 254.2 for complete warranty information.

COVERAGE\* FT² (m²)  
\*Approximate

TILE SIZE	JOINT WIDTH			
	1/16" (1.5 mm)	1/8" (3 mm)	1/4" (6 mm)	3/8" (9 mm)
1" x 1" x 1/4" (25 x 25 x 6 mm)	100 (10.2)	51 (5.3)	28 (2.8)	20 (2.0)
2" x 2" x 1/4" (50 x 50 x 6 mm)	196 (20.1)	100 (10.2)	52 (5.3)	36 (3.6)
4" x 4" x 5/16" (100 x 100 x 8 mm)	316 (30.4)	162 (15.5)	84 (8.1)	59 (5.6)
8" x 8" x 3/8" (200 x 200 x 9 mm)	517 (53.0)	259 (26.6)	131 (13.4)	88 (9.0)

TILE SIZE	JOINT WIDTH			
	1/8" (3 mm)	1/4" (6 mm)	3/8" (9 mm)	1/2" (12 mm)
12" x 12" x 3/8" (300 x 300 x 9 mm)	388 (39.8)	195 (20.0)	131 (13.4)	99 (10.1)
16" x 16" x 3/8" (400 x 400 x 9 mm)	517 (53.0)	259 (26.6)	174 (17.8)	131 (13.4)
18" x 18" x 3/8" (450 x 450 x 9 mm)	581 (58.3)	292 (31.9)	195 (21.4)	147 (16.2)
24" x 24" x 3/8" (600 x 600 x 9 mm)	774 (79.4)	388 (39.8)	259 (26.6)	195 (20.0)

LATICRETE International, Inc.  
One LATICRETE Park North  
Bethany, CT 06524-3423 USA  
1.800.243.4788  
+1.203.393.0010  
www.laticrete.com