




Koffler Sales Company

Specialists in Floor and Wall Protection
For Over 50 Years!

Anti Slip Stair Tread

Model: VGL-005

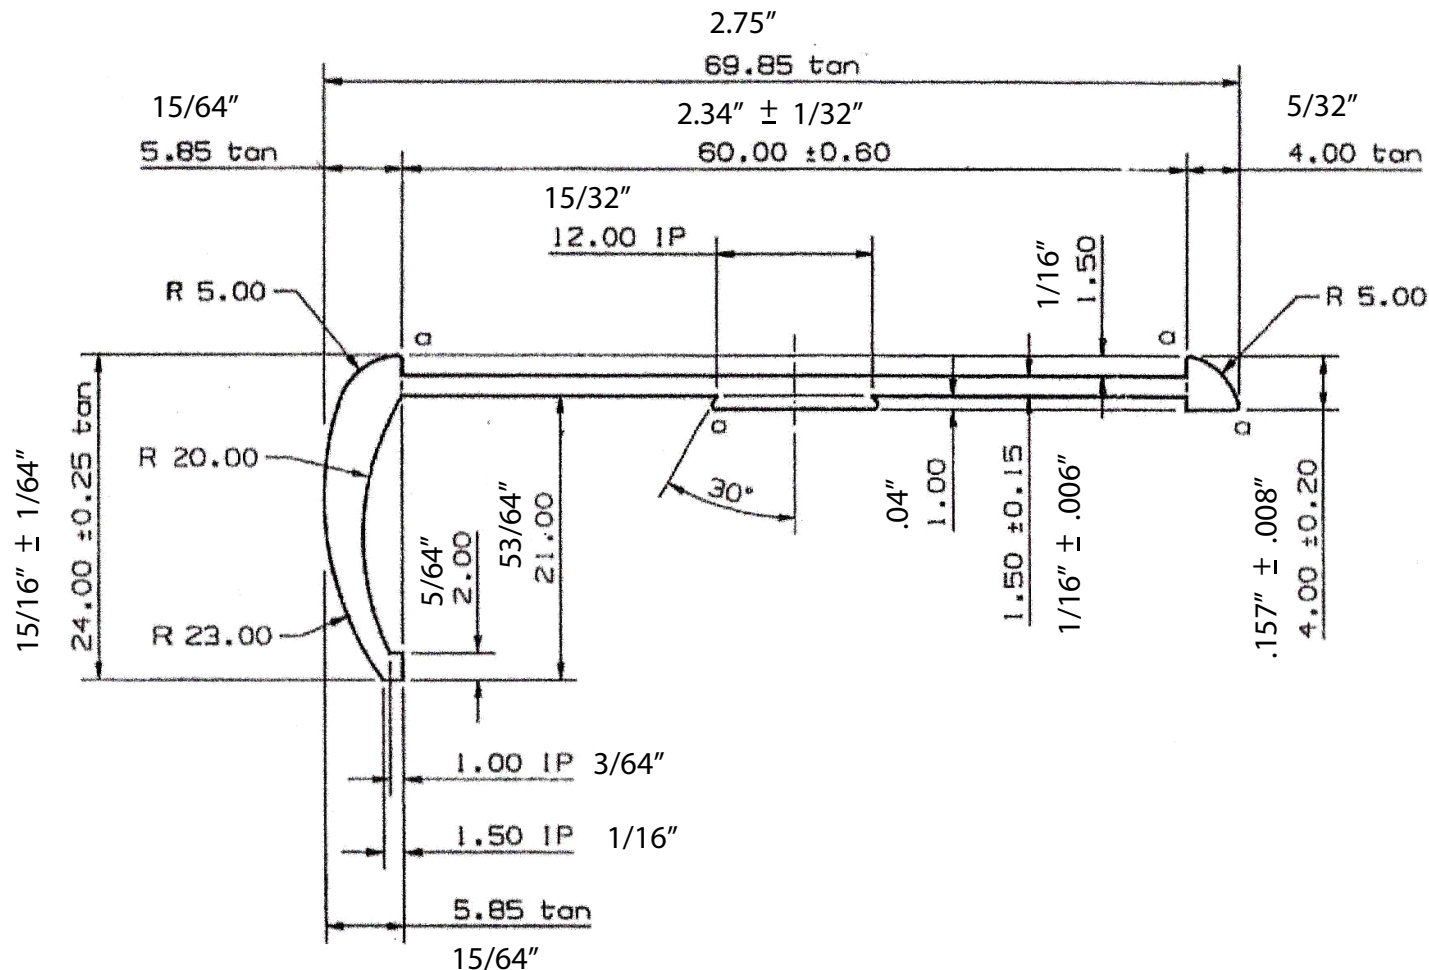

FLATNESS 0.40mm / 100mm
ANGULARITY 2°
STRAIGHTNESS 0.60mm / 300mm
TWIST 0.50° / 300mm 5° max

MOMENTS OF INERTIA:


$I_{xx} = 5\,978\text{ mm}^4$
 $I_{yy} = 95\,839\text{ mm}^4$

$a = 0.30$ radius

1.50±0.15 TYP WALL THICKNESS
UNLESS OTHERWISE SPECIFIED

0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

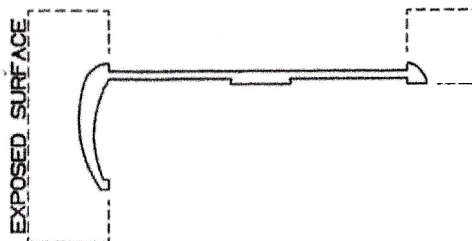

AREA	184.7	sq mm
WEIGHT	0.500	KG M
PERIMETER	188.6	mm
ANOD PERM	188.6	mm
PAINT PERM	100.0 (0.0)	mm
CIRCLE DIA	70	mm
FACTOR	377	
ALLOY	6063	
TEMPER	T6	





Koffler Sales Company

Specialists in Floor and Wall Protection
For Over 50 Years!

Anti Slip Stair Tread

Model: VGL3969

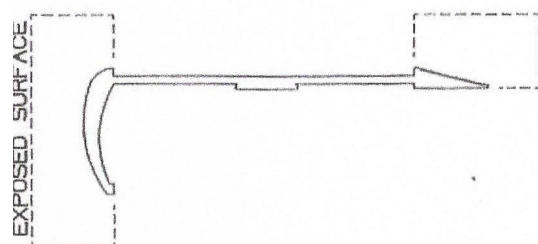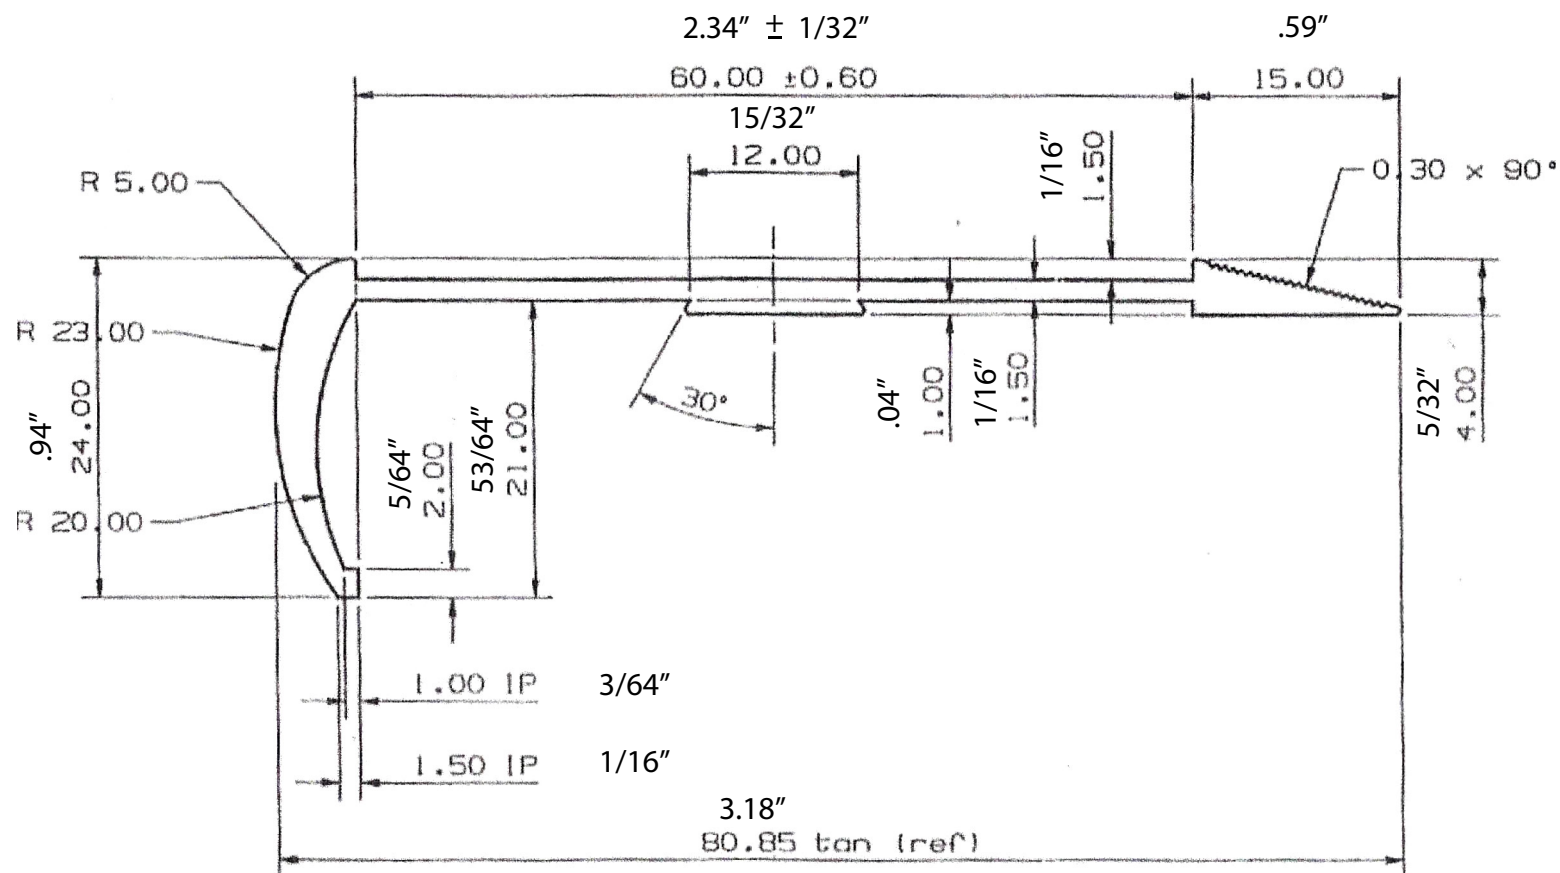

MOMENTS OF INERTIA:

$I_{xx} = 8.122 \text{ mm}^4$
 $I_{yy} = 139.580 \text{ mm}^4$

1.50±0.15 TYP WALL THICKNESS
UNLESS OTHERWISE SPECIFIED

0.40 RADIUS ON ALL OUTSIDE CORNERS
UNLESS OTHERWISE SPECIFIED

EXTRUDED FINISH : ARCHITECTURAL

AREA	205.4	SQ MM
WEIGHT	0.557	KG M
PERIMETER	214.8	MM
ANOD PERIM	214.8	MM
PAINT PERIM	107.4	MM
POLISH PERIM	100.0	MM
CIRCLE DIA	81	MM
FACTOR	386	
ALLOY	6063	
TEMPER	T6	